



Product Profile

- Rugged encapsulation for harsh environments
- Consistent UHF range performance worldwide
- Gen 2 and ISO 18000-6B versions
- Superior performance on a variety of materials
- Reusable for lower cost per use



UHF SMALL RIGID RFID TAG

Intermec's Small Rigid Tag (SRT) is a truly passive UHF RFID tag designed for superior performance on a variety of surfaces. The tag available in both Gen 2 and ISO 18000-6B protocols, combines an impressive range with a rugged yet compact design, suitable for harsh industrial applications, and survival in application temperatures up to 250° F (121° C). Additionally, the small rigid tags have a wide band antenna design, which allows for a single tag to be used virtually anywhere in the world and on a variety of surfaces, including metal, plastic and wood.

The Small Rigid Tags are ideal for industrial applications where ruggedness, chemical resistance or higher temperature ratings are required and where tag size is an important consideration.

Typical applications include:

- Reusable plastic containers (RPC)
- Metal cages
- Pallets
- Unit Loading Devices (ULD)
- Gas cylinders
- Beer kegs & other commercial beverage containers
- Hazmat containers
- Chemical containers

Attachment Methods

The tags can be attached using screws, rivets, double-sided adhesive strips, or a variety of other methods appropriate for the application. Each tag has two mounting holes for up to #6 hardware (not included).

Reader Compatibility

Intermec manufactures a complete line of readers that are compatible with the small Rigid Tags as indicated in the table below.

Tag Type	Intermec Reader Models
EPC Global Gen 2	IP4 Hand-Held Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader
ISO 18000-6B	IP3 Hand-Held Reader IP4 Hand-Held Reader Pennsylvania Fixed Serial Reader IF4 Fixed Serial Reader IF5 Fixed Network Reader IV7 Vehicle Mount Reader

Competitive readers conforming to the Gen 2 and ISO 18000-6B protocols can also read the tags conforming to these respective protocols.

Temperature Ratings

The new Intermec Rigid Tags are rated for applications with temperatures ranging from -40° to 250° F (-40° to 121° C).

Chemical Resistance


The Rigid Tags are tested for resistance to the following chemicals.

- Machining oil and fluid (long-term exposure)
- Gasoline
- Motor oil
- Methyl Ethyl Ketone (MEK)
- Isopropyl alcohol
- Methyl alcohol
- Mineral spirits
- Acetone
- Kerosene

Optimal Frequencies of Operation

- ISO 18000-6B: 860 MHz to 930 MHz
- EPCglobal Gen 2: 860 MHz to 960 MHz

Read Range Performance of Small Gen 2 Rigid Tag

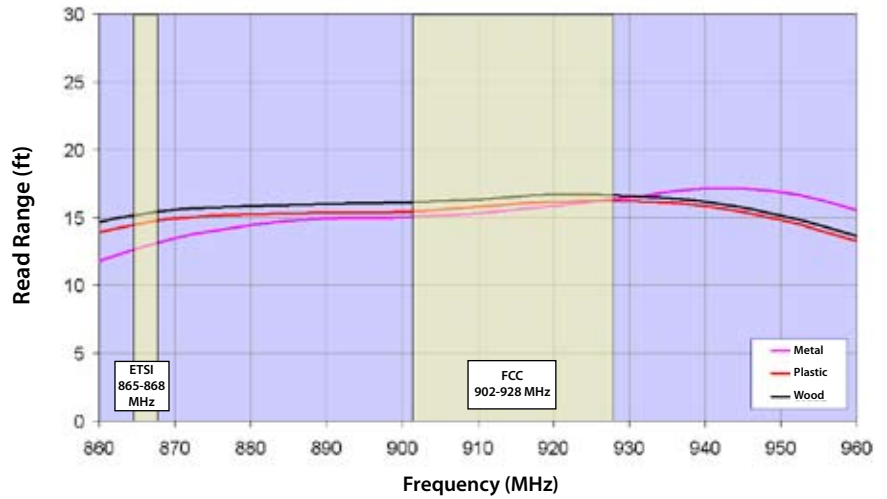


Note

Actual range performance may vary depending on power output, temperature and other environmental factors.

Size

1.22 in x 3.11 in (3.10 cm x 7.90 cm)

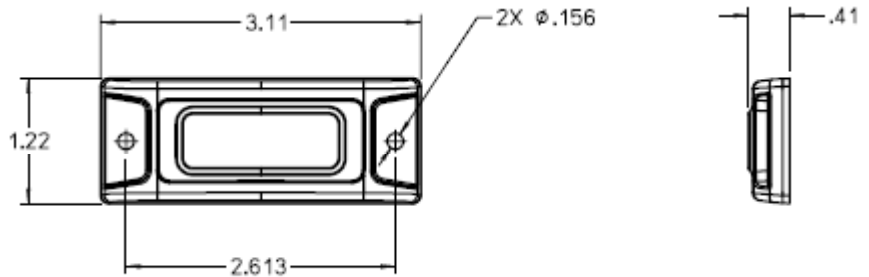

North America
Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies
9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

Canada
7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974

**Europe/
Middle East & Africa
Headquarters**
Reading International Business Park
Basingstoke Road
Reading RG2 6DD
United Kingdom
tel: 44.118.923.0800
fax: 44.118.923.0801

**Asia
Asia Regional Office**
26-16 International Plaza
10 Anson Road
Singapore 079903
tel: 65.6324.8391
fax: 65.6324.8393

Beijing Representative Office
29 FL, Unit A1, China Merchant Tower
118 Jian Guo Road
Chaoyang District, Beijing 100022
Tel: 86.10.5165.5922
Fax: 86.10.6567.6778

Australia
Level 4, 1-3 Atchison Street
St. Leonards, NSW 2065
Australia
tel: 61.2.9330.4400
fax: 61.2.9437.0204

**South America & Mexico
Intermec South America Ltda.**
Rua Samuel Morse 120 9 andar
Brooklin CEP04576-060
São Paulo, SP
Brazil
tel: 55.11.5502.6770

Intermec Technologies de Mexico
Av Tamaulipas #141, Primer Piso
Col. Hipodromo Condesa
Mexico, DF, 06140 Mexico
tel: 525.55.241.4800
fax: 525.55.211.8121

Internet
www.intermec.com

Sales
800.934.3163
(toll free in N.A.)
tel: 425.348.2726

OEM Sales
tel: 425.348.2762

**Customer Service and
Support**
800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2006 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A.
611767-01A 07/06

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.